

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 689 950 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.04.1999 Bulletin 1999/17

(51) Int. Cl.⁶: **B60C 23/04**

(21) Application number: **95250129.4**

(22) Date of filing: **30.05.1995**

(54) **Method of monitoring conditions of vehicle tires and tires containing a monitoring device therein**

Verfahren zur Überwachung von Fahrzeugreifen und Reifen mit einer Überwachungseinrichtung

Procédé de surveillance de l'état de pneumatiques de véhicules et pneumatiques comportant un dispositif de surveillance

(84) Designated Contracting States:
DE ES FR GB IT

(30) Priority: **03.06.1994 US 253885**

(43) Date of publication of application:
03.01.1996 Bulletin 1996/01

(73) Proprietor:
BRIDGESTONE/FIRESTONE, Inc.
Akron, Ohio 44317-0001 (US)

(72) Inventors:
• Koch, Russell W.
Hartville, OH 44632 (US)
• Takigawa, Hiroyoshi
Nashville, TN 37217 (US)
• Turner, John L.
Akron, OH 44313 (US)

• Okamoto, Kelzo
Murfreesboro, TN 37129 (US)
• Walenga, Guy J.
Mt. Juliet, TN 37122 (US)

(74) Representative:
von Raffay, Vincenz, Dipl.-Ing. et al
Patentanwälte Raffay & Fleck
Postfach 32 32 17
20117 Hamburg (DE)

(56) References cited:
EP-A- 0 505 906 EP-A- 0 639 472
WO-A-94/06640 WO-A-95/22467
DE-A- 3 736 803 GB-A- 2 243 010
US-A- 3 662 335 US-A- 3 787 806
US-A- 4 067 235

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 689 950 B1

Description

FIELD OF THE INVENTION

[0001] This invention pertains to a method for monitoring various conditions of pneumatic tires and to tires containing a monitoring device. More particularly, the invention relates to a method of monitoring tires which uses an active, self-powered, programmable electronic device which is generally installed in or on the interior portion of a pneumatic tire or on a tire rim. The device can be used for monitoring, storing and telemetering information such as temperature, pressure, tire mileage and/or other operating conditions of a pneumatic tire, along with tire identification information.

BACKGROUND OF THE INVENTION

[0002] It is desirable to monitor the condition of tires as to wear, internal temperature and internal pressure. It is particularly advantageous to monitor large truck tires since these are expensive and must be regularly maintained to maximize vehicle efficiency.

[0003] In the past, such monitoring activities have generally used a passive integrated circuit embedded within the body of the tire and activated by a radio frequency transmission which energizes the circuit by inductive magnetic coupling. Passive devices which rely on inductive magnetic coupling or capacitive coupling generally have the disadvantage of requiring lengthy coil windings, thus requiring major modifications in the tire construction and assembly process. Another serious disadvantage with such passive devices is that the interrogator must be positioned in very close proximity to the tire, usually within a few inches of the tire, in order to allow communication between the tire and the device. Because of the proximity requirements, continuous monitoring is impractical since it would require that an interrogator be mounted at each wheel of the vehicle. Manual acquisition of data from the passive devices embedded in each of the tires of a parked vehicle is also cumbersome and time consuming because of the proximity requirements.

[0004] Other prior art devices used for monitoring tire conditions have comprised self-powered circuits which are positioned external of the tire, such as at the valve stem. Externally mounted devices have the disadvantage of being exposed to damage, such as from weather and vandalism. Another disadvantage with installing devices external of the tire is that the device itself introduces additional sealed joints from which air may leak. Additionally, externally installed devices can easily become disassociated from a particular tire which is being monitored.

[0005] Another disadvantage with known tire monitoring and identification devices is that communication transmissions are achieved using conventional radio frequencies which generally require a relatively large

antenna which must be mounted externally or secured to the tire in such a manner which requires relatively major modifications in the tire construction or assembly process.

[0006] Attention is drawn to WO 95/22467 which falls under Article 54(3) EPC.

SUMMARY OF THE INVENTION

[0007] In accordance with an aspect of the present invention, a method of monitoring tires is provided in which an activatable monitoring device or tag is mounted within at least one tire of a vehicle, on the interior surface thereof, or on the tire rim. The device is activated by means of an interrogator signal having a frequency in the microwave range. In response to the signal, the monitoring device measures and transmits information relating to one or more conditions such as the internal pressure and temperature of the tire, the number of rotations of the tire, and tire identification information. Desirably, the tire information is received at a monitoring station where the information can be viewed on a color coded, visual display, and even have an audio signal and/or flashing lights to indicate an undesirable condition with respect to acceptable values. The display can show all the tires of a vehicle sequentially or at the same time. Alternatively, the monitoring device can be activated to transmit the various conditions to a host storage device located in a weigh station, a trucking terminal, etc., which thus can record and contain the history of the transmitted condition values of the individual tires.

[0008] The monitoring device includes an active circuit which is powered by a dedicated, long life, miniature battery and one or more sensors for detecting and transducing operating conditions. The device further includes integrated circuitry; a programmable microprocessor for processing the electrical signals from the sensor and for data storage including tire identification information; and a microwave receiver/transmitter for receiving and telemetering the processed electrical signals from the sensors in response to an electromagnetic signal from an external interrogator. By using microwave frequency transmissions, it is possible to achieve relatively long-range transmissions using a relatively small antenna. The monitoring device can be installed either on new tires during the manufacturing process or added to existing tires.

[0009] The monitoring device is preferably capable of being programmed to remain in a dormant mode unless a condition limit has been exceeded such that the monitoring device does not respond to routine interrogation unless a condition limit has been exceeded.

[0010] The monitoring device can be secured to the tire wall by means of a pocket or cover which holds the device to the tire. The cover or pocket can be secured to the tire by utilizing a chemical or heat activatable adhesive. The monitoring device is secured to the tire in such

a manner and location as to minimize stress, strain, cyclic fatigue, impact and vibration.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig. 1 is a partial cross-sectional view of a pneumatic tire in accordance with the invention with monitoring devices installed at two alternative locations within the pressurizable cavity of the pneumatic tire;

Fig. 2 is a block diagram of the electrical components and antenna of the monitoring device utilized with the present invention;

Fig. 3 is a side elevation view of an alternate configuration of the electrical components and antenna of the monitoring device shown in Fig. 2;

Fig. 4 is a block diagram of the micro-chip contained in the monitoring device shown in Fig. 2;

Fig. 5 is a block diagram of an interrogator which communicates with and retrieves information from the monitoring device;

Fig. 6 is a cross-sectional view of an encapsulated electronic monitoring device assembly;

Fig. 7 is a cross-sectional view of a monitoring device assembly which is mounted to the interior wall of a pneumatic tire by means of a cover secured to the interior wall of the pneumatic tire;

Fig. 8 is a cross-sectional view of a monitoring device assembly which is positioned within a recess on and is mounted to an interior wall of a pneumatic tire by means of a cover secured to the interior wall of the pneumatic tire;

Fig. 9 is a perspective view of the cover securing the monitoring device assembly to the interior wall of the housing;

Fig. 10 is a cross-sectional view of a suitable cover formed on the interior wall of a pneumatic tire for securing a monitoring device thereto;

Fig. 11 is a sectional view of a pocket assembly in accordance with another embodiment of the invention;

Fig. 12 is a top view of the pocket assembly of Fig. 11;

Fig. 13 is a sectional view of a tire having a monitoring device assembly embedded in the interior of the tire in the vicinity of the tire crown;

Fig. 14 is a sectional view of a tire having a monitoring device assembly embedded in the tire on the tire interior in the vicinity of the tire bead; and

Fig. 15 is a sectional view of another embodiment of the tire showing the monitoring device assembly attached to the interior of the tire in the vicinity of the tire crown.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] In accordance with an embodiment of the invention, a method of monitoring at least one condition of a tire is provided including the steps of providing the tire with an internally mounted monitoring device; sensing and measuring engineering conditions, including but not limited to temperature, pressure, distance, speed, etc. and/or storing the sensed conditions as data with the device pertaining to the monitored condition; activating the device to cause transmission of the measured data; and optionally comparing the data to preselected limits and signaling an alert if the limit is exceeded. The phrase "internally mounted" means that the monitoring device is built into the tire or mounted on an interior surface of a pressurizable cavity formed between the tire and the rim of a tire/rim combination or on the tire rim itself. The monitoring device is desirably activated by the transmission of a radio frequency interrogation signal when the tire is within a desired range of a signal transmitter. The monitored conditions can include pressure, temperature, or revolution and/or mileage information, and also tire history or identification information such as serial number, tire size, date and location of manufacture, retread information and the like.

[0013] In accordance with another embodiment of the invention, a tire is provided which is preferably a pneumatic tire having a monitoring device internally mounted within the tire at a location as noted in the above paragraph. Regardless of the monitoring device location, it optionally can be encased with materials set forth hereinbelow. When located in a recess or on the surface of the tire interior, it can optionally be housed within a cover or a pocket. The specific attachment or adhering means can be through the use of a chemical cure adhesive including a room temperature amine curable adhesive or a heat activatable cure adhesive.

[0014] Referring now to the drawings, in Fig. 1 there is shown a partial sectional view of a pneumatic tire 5 having a monitoring device 10 or 10' secured to the inner wall of the pneumatic tire 5 at two preferred locations thereof. In practice, a pneumatic tire would generally have only one electronic monitoring device at any interior tire location or on tire rim 12. As apparent from Fig. 1, one preferred location is in the vicinity of the tire bead below the end of the body ply turn-up where the sidewall bending stiffness is greatest and where the rolling tire stresses are at a minimum. The lower most extent of the tire bead location wherein such properties are obtained is generally the bottom of the tire bead. In a specific tire, for example, a 285/75R24.5 R299 Truck/Bus Radial ("TBR"), this preferred location is a distance of about one to about two inches above the toe bottom of the tire. Above the noted range, the cyclic strain amplitudes grow very quickly. As also shown in Fig. 1, another preferred location of the monitoring device is on the inside of the tire at the center of the tread crown where tire

stresses from mounting and dismounting are at a minimum.

[0015] The monitoring device 10 is comprised of a microchip 20, an antenna 30, an amplifier 42, a battery 44, a pressure sensor 46, and optional temperature and mileage/distance sensors (not shown), populating a circuit board 48 as depicted in Fig. 2. While not shown in the embodiment of Fig. 2, it is envisioned that the microchip 20 itself can contain all or some of the aforementioned components.

[0016] While optional, it is desirable that the monitoring device be contained in a rigid or semi-rigid encasement to enhance rigidity and inhibit straining of the device. This reinforcing encasement or encapsulation is a solid material, i.e., non-foam compounds, which is compatible with the tire rubber, such as various urethanes, epoxies, unsaturated polyester-styrene resins, and hard rubber compositions. Hard rubber compositions generally refer to any type of rubber or elastomer which is crosslinked and has a Shore A hardness of from about 50 to about 100, and desirably a Shore D hardness of from about 5 to about 80 and preferably a Shore D hardness from about 40 to about 80. We have found that the solid materials most suitable for use as reinforcement encasement or encapsulation of the device typically have an elastic modulus (Young's Modulus, E) in the range of about 689 MPa (100 ksi (100,000 pounds per square inch)) to about 3.4 GPa (500 (500,000 pounds per square inch) ksi). The actual selected elastic modulus of the solid reinforcement encasement materials used to encase the device are a function of the stiffness of the monitoring device itself.

[0017] An example of the monitoring device being encapsulated is shown in Fig. 6, wherein monitoring device 10 is encased within encasement or encapsulating material 16 to form monitoring device assembly 17. As shown in Fig. 6, it is an important aspect of the present invention that the sensor 46, which measures pressure, have an opening, aperture, etc., 18 to allow an air path to the sensor so it can measure the internal tire pressure.

[0018] Referring now to Figs. 7 and 8, and as noted above, monitoring device assembly 17 can optionally have a flexible housing such as pocket 75 or cover 80. Suitable housing materials which function to hold the monitoring device to the tire include generally flexible and resilient rubbers such as natural rubber or rubbers made from conjugated dienes having from 4 to 10 carbon atoms such as synthetic polyisoprene, polybutadiene, styrene-butadiene rubber, and the like, flexible polyurethanes, flexible epoxides, and the like, and having a hardness on the Shore A hardness scale of from about 50 to about 95, and preferably from about 55 to about 75.

[0019] Fig. 9 is a perspective view of Figs. 7 and 8 showing the cover 80 secured to the interior wall 7 of tire 5. The cover 80 has an adhering surface which secures the monitoring device assembly to a surface of the tire,

preferably within the pressurizable tire cavity. Slit 84 provides an air passage so that the pressure sensor can appropriately monitor air pressure.

[0020] Fig. 7 shows monitoring device assembly 17 secured to tire 5 through cover 80. The cover has a slit 84 to allow a pressure sensor of the device to detect the internal tire pressure. Generally, cover 80 is secured to the interior portion of the tire. Except for the opening or slit 84 necessary for pressure sensing, the cover 80 surrounds the monitoring device assembly 17 as shown in Fig. 7, and is secured to the interior portion of the tire about the perimeter of the monitoring device assembly.

[0021] As apparent from Fig. 8, the monitoring device assembly 17 is located within tire pocket or recess 75. The tire pocket or recess 75 can be made by inserting a rectangular TEFLON® (PTFE) billet of the appropriate dimensions onto the uncured tire interliner at the location of the desired recess 75. During tire manufacturing, the curing pressure of the mold will press the billet into the tire inner liner and cure in the recess pocket 75 as shown in Fig. 8. Cover 80 is then attached about the perimeter of the monitoring device assembly to the tire inner liner. Cover 80 also has a slit 84 therein to allow detection of air pressure. Cover 80 may be co-cured with the green tire or may be attached to the tire after curing by use of various types of adhesives as discussed below.

[0022] Referring now to Fig. 10, when a cover 80 such as shown in the configurations of Figs. 7 and 8 is utilized, a non-adhering sheet 86, constructed, for example from TEFLON® (PTFE) or silicon release materials, can be placed between the cover 80 and the underlying tire inner wall 7 to ensure that a cavity is formed to house the monitoring device assembly. The cover is then adhered to the interior of the tire utilizing a suitable adhesive system. After curing of the adhesive system, the non-adhering sheet 86 is removed. The monitoring device, whether or not encapsulated, can then be inserted through the slot of flexible cover 80. Alternatively, the monitoring device, whether or not encapsulated, can be positioned in an abutting relationship with tire 5 and cover 80 installed thereover and adhered to tire 5 at the cover perimeter by a suitable adhesive.

[0023] In preferred embodiments as shown in Figs. 11 and 12, the monitoring device is contained within housing pocket 90 which has a slot for mounting the assembly within the pocket and through which the antenna of the monitoring device can project after assembly. Further, pocket 90 includes an optional substrate 110 such as to assure adhesion of pocket 90 to tire 5. The housing pocket 90 comprises a top portion or cap 92 having a pocket cavity 94 for receiving and retaining monitoring device assembly through opening 96. Pocket cavity 94 is generally of a suitable size and shape to snugly hold or secure monitoring device assembly. Pocket 90 also includes band 98 for securing and biasing antenna 30 of the monitoring device assembly to raised portion 102 of pocket 90.

[0024] Another manner of securing the monitoring device assembly 17 to tire 5 is to physically embed monitoring device assembly 17 within tire 5 during the manufacture of the tire by placing the device between the tie-gum ply 199 and inner liner ply 200 of the uncured tire. After curing, the device is permanently contained in the tire structure. Figure 13 illustrates a tire cross section containing an embedded monitoring device assembly 17 positioned in the inner liner body ply portion 200 located at or in the vicinity of tire crown 202 by this method. Crown 202 is one of the preferred locations for placement of the monitoring device. Experience has shown that the monitoring device should not contact the body ply 204 because such contact may degrade the durability and structural performance of body ply 204. Another preferred location is near tire bead 210 as shown in Figure 14. A small removable dowel 206 is contained in the monitoring device assembly 17 at the time of placement in the green tire. The dowel 206 presses through inner liner ply portion 200 upon the application of curing pressures to form a hole or aperture for air passage to the pressure sensor in the monitor assembly 17. The dowel 206 should have suitable dimensions and a smooth, rounded end to ensure passage through the soft inner liner rubber without damaging the mold bladder (not shown) which is used during the tire curing operation. If desired, the mold bladder can be reinforced at the location of monitoring device assembly 17 and dowel 206. Dowel 206 is removed after curing of the tire, leaving a finished air hole.

[0025] A second embodiment for embedding the monitoring device assembly is illustrated in Fig. 15. In this method, a dowel 220 is first inserted through an inner liner patch 222, and then into the monitoring device assembly 17. Next, monitoring device assembly 17 is sandwiched between the uncured tire inner liner ply 200 and inner liner patch 222. After curing, the monitoring device assembly 17 is permanently embedded between patch 222 and ply 200. In this procedure, a larger, contoured dowel head 224 can be employed to further reduce trauma to the mold bladder (not shown).

[0026] The various adhesive systems which can be used to adhere the monitoring device to the tire embrace numerous chemical cure adhesives including ambient temperature amine curable adhesives. Heat cure adhesives can also be used. Suitable chemical cure adhesives include conventional sulfur cure systems such as various self vulcanizing cements, various chemical vulcanizing fluids, and the like such as those sold by The Patch Rubber Company of Roanoke Rapids, North Carolina.

[0027] The room temperature or ambient amine curable adhesive system comprises initially applying a treating agent to the various surfaces to be adhered (e.g., tire, cover, etc.) followed by the application of various amine curable polymers or prepolymers. Suitable treating agents include various N-haloamides, the various N-halohydantoins, the various N-haloimides, and combi-

nations thereof. Examples of various desirable N-halohydantoins include 1,3-dichloro-5,5-dimethyl hydantoin; 1,3-dibromo-5,5-dimethyl hydantoin; 1,3-dichloro-5-methyl-5-isobutylhydantoin; and 1,3-dichloro-5-methyl-5-hexyl hydantoin. Examples of N-haloamides include N-bromoacetamide and tetrachloroglycoluril. Examples of N-haloimides include N-bromosuccinimide and the various chloro substituted s-triazinetrienes, commonly known as mono-, di-, and trichloroisocyanuric acid. A preferred treating composition for use in the practice of the present invention are the various mono-, di-, or trichloroisocyanuric acids, or combinations thereof. Trichloroisocyanuric acid is especially preferred.

[0028] The treating agents usually exist in solid form. They are readily soluble in solvents such as acetone and the like and thus can be applied in liquid form. Application of the treating agent generally occurs at ambient temperatures. Application can occur through any conventional manner as through brushing, spraying, and the like. The amount applied is such that the substrate is coated. Preferably, two or more coats of the treating agent or adhesive compound are used to ensure that all the cured rubber substrate surface has been coated.

[0029] Said ambient temperature amine curable adhesive systems are known to the art and literature as set forth in U.S. Patent Nos. 4,718,469, 4,765,852, and 4,923,543.

[0030] The heat cured adhesion systems generally utilize various adhesives which upon heating to temperatures of at least 100°C and generally from about 115 to about 170°C form an adhesive bond between the tire substrate and directly or indirectly with the monitoring device, it being understood that the curing time required is dependent on temperature, with shorter times required at higher temperatures. Suitable conventional heat cured adhesives are known to the art and include various extruder cements, various retread and vulcanizing cements, and the like, for example, those sold by The Patch Rubber Company of Roanoke Rapids, North Carolina.

[0031] The adhesive may be directly applied to the monitoring device, to the encased or encapsulated monitoring device assembly, to the cover or pocket for the monitoring device, or any combination thereof. Alternatively, the monitoring device or monitoring device assembly can be attached to the tire rim with a suitable adhesive. When a cover or pocket is utilized, an intermediate layer such as a cushion gum layer is optionally but desirably contained between the adhesive applied to the cover or pocket on one hand and the adhesive applied to the tire interior on the other hand to insure better adhesion of a monitoring device to the tire. Desirably, both the tire and the cover or pocket have previously been buffed and cleaned with a solvent and coated with an adhesive.

[0032] Referring now to the monitoring device or tag 10, it includes a board made of a suitable material to

hold the various components, one of which is an integrated circuit or micro chip 20 as is shown in the block diagram of Fig. 4. The integrated circuit preferably includes one or more analog to digital converters for digitally coding internal and or external analog signals. Suitable integrated circuits for use with the invention are commercially available and/or can be fabricated. One such commercially available circuit, 20 which has been found to be particularly well suited for use with the invention is an RFID "Micron" chip available from-Micron Communications, Inc. of Boise, Idaho. Fig. 4 is a block diagram of the "Micron" chip which is suitable for use with the invention.

[0033] The chip 20 contains a central processing unit for processing commands, a 256 byte random access memory and micro wave radio circuitry for transmission and reception of data. The center frequency of transmission is 2.45 GHz. Circuitry for low and high frequency transmission bands are utilized by the chip to wake up or turn off to outside transmissions (instructions), according to a scheme developed by Micron and defined in their protocol publication of July 22, 1993, pre-release Ver. 0.95. Internal sensors for monitoring temperature, supply voltage, magnetic field strength and ambient light intensity are contained in the chip. The chip also has communication ports supporting digital and analog input/output functions. The analog port can be programmed to source up to 2 milliamps of current. Analog input voltages from 0 to 2.5 volts can be read for monitoring external sensors. Up to 256 analog ports can be sampled by multiplexing. The chip can execute up to 30 predefined commands sent by radio transmission. These commands include functions dealing with tag identification, memory read/writes, I/O port read/writes, alarm threshold settings, password/security and enable/disable commands.

[0034] The integrated circuit 20 also preferably includes the already discussed internal sensors and/or one or more external analog ports for receiving an analog signal from one or more external sensors. The device optionally but preferably includes a pressure transducer which is preferably a solid state device such as a piezo-resistive pressure sensor. Suitable piezo-resistive pressure sensors are available from Lucas NovaSensor. Particularly preferred are Lucas NovaSensor's NPC-103 series sensors.

[0035] The temperature sensor can also generally be any conventional sensor such as Model No. LM 35 CAZ made by National Semiconductor. The tire mileage detector can give out a readout signal in miles, kilometers, etc., and preferably may be in the form of a mild magnetic detector responsive to an external magnetic field which field is sensed by the detector upon each full revolution of a tire. Alternatively, a detector may detect each up or down cycle of the tire and produce a signal which is counted. This counted number can then be used to calculate tire mileage. An additional sensor which can be utilized is a speed sensor which monitors

the speed of the vehicle.

[0036] The electronic monitoring device or tag 10 contains various components for receiving and transferring information to the interrogator. A specific component is the amplifier 42 which is used to boost the analog signal received from various sensors and transmit the same to the chip and subsequently to the interrogator. The amplifier can be connected to an external analog port of the microchip 20. The electronic monitoring device is active inasmuch as it contains a power source such as a battery and thus is self-powered. Any conventional long life alkaline battery 44 can be utilized such as a 0.07 amp hour, lithium thionyl chloride battery, type 7-10 made by Battery Engineering, Inc., of Hyde Park, MA.

[0037] Monitor 10 also includes a microwave antenna 30 which can be located either adjacent to the monitoring device shown in Fig. 2 or alternatively on the backside thereof as shown in Fig. 3. The antenna 30 can be a suitable conducting means such as a single serpentine narrow wire or a thin sheet of a metal foil, for example, copper, so long as it has a resonance frequency similar to the microwave transmission frequency. Generally, any microwave frequency can be utilized such as from about 1×10^9 to about 5×10^9 hertz with a suitable frequency being from about 2.40 to about 2.49×10^9 hertz.

[0038] Another embodiment, not shown, utilizes sensors exterior of monitoring device 10 as in the form of decals having lead lines running to the monitoring chip.

[0039] Fig. 5 is a block diagram of a generic type interrogator 60 which can be used to communicate with and retrieve digitally coded information from the electronic monitoring device. The interrogator includes microwave transmitter and receive circuits for communicating with the micro chip. The RF transmitter utilizes dual frequency bands so that only tags (i.e. monitoring devices) programmed to respond to a certain band will be activated, leaving the others dormant and conserving battery power. This is called "data band switching" and is defined as part of the public domain Micron protocol. The interrogator includes circuitry to receive and transmit using spread spectrum modulation as defined in the Micron protocol and as required by the FCC for microwave communication devices. The power level of transmission is user selectable and either one or two antennas can be employed by the interrogator to improve reception. The interrogator includes I/O communications hardware to support interaction with a host computer via parallel, serial RS-232, RS-485 and Ethernet links. A commercially manufactured interrogator of the type described is available from Unisys Corp., Salt Lake City, Utah. The interrogator can be interfaced with a computer 70 to allow downloading, archiving, and analysis of data transmitted from the electronic monitoring device 10. Moreover, different interrogators or a plurality thereof can be utilized with respect to different interrogation situations.

[0040] The interrogator can be remotely located in a

vehicle, e.g., a truck, to permit intermittent monitoring at regular intervals such as every thirty minutes, to alert the driver of the vehicle of any imminent or impending problems such as over or under inflation or abnormally high temperatures. Alternatively, the interrogator can be located at a vehicle service stop, e.g., fuel station, trucking terminal, or at any other convenient location for archival, and/or current sensor readouts of tire pressure and tire revolutions, etc., as through visual readouts, flashing lights, etc., as noted above. The monitoring devices in each tire can be interrogated for information at regular or arbitrary intervals and the data can be stored on a computer interfaced to the interrogator. The monitoring device 10 can also be programmed to act as an alarm system to warn of extreme temperature or pressure conditions, or it may be used to log pressure and/or temperature histories during tire operation. Such data can be used, for example, to evaluate the retreadability of truck tires.

[0041] The interrogator includes various features such as software protocol for sorting, identifying and communicating with multiple monitoring devices without ambiguity, thus enabling a signal interrogator to quickly sort and retrieve information from a plurality of monitoring devices associated with individual tires on a vehicle or on multiple vehicles. The broadcast range, from within a tire can vary, such as in excess of fifty feet, thus permitting a stationary interrogator to quickly query all tire chips on a vehicle which is passing by the interrogator or from an on board vehicle location.

[0042] In accordance with the preferred mode of the invention, a tire is provided with a self-powered monitoring device on the interior or within the tire or on the tire material. The monitoring device includes means to sense and store data regarding a tire condition, such as temperature or pressure. In response to a triggering signal, the power source of the monitoring device is activated and the device transmits the condition data. For example, the monitoring device may be identified by having the interrogator read the identification code associated with the tire to which the monitoring device is affixed. The identification code can, for example, be stored as a 10 byte number, the first 4 bytes containing a standard international classification (SIC) code, the next 2 bytes containing a specialty code, and the last 4 bytes identifying the particular tire. Further in accordance with the preferred mode of the invention, the monitoring devices 10 include low to high data band switching for selective communication between multiple interrogators and multiple monitoring devices. The low band can correspond to a dormant mode wherein battery power is conserved. Monitoring device 10 will remain dormant unless an interrogator broadcasts a low band instruction to activate the device. The monitoring device and interrogator frequencies can be switched upon command. This allows for selective groups of monitoring devices to become active and respond to an interrogator broadcast while others remain dormant.

The monitoring device frequency can be switched by an externally measured event which is being monitored by a sensing device (e.g. temperature) so that it activates in response to an interrogator upon a preset limit to a monitored condition being exceeded. High and low sensor thresholds can be programmed to determine when frequency switching occurs, thus enabling the monitoring devices to operate in an alarm mode.

[0043] Also in accordance with a preferred mode of the invention, communications between multiple monitoring devices and an interrogator or multiple interrogators is facilitated by means of an arbitration method, thereby permitting unambiguous communications. The interrogator, monitoring device, and data communication protocol preferably allow various commands to be transmitted from the interrogator to the monitoring device. Examples of desired commands include functions dealing with tire identification, memory, digital and analog port read/writes, alarm threshold settings, password and security data and enable and disable commands. These commands determine the functionality of the monitoring device and permit customization of operation for different applications. For example, through software commands a monitoring device can be set to ignore inquiries from an interrogator unless a tire temperature exceeds a certain threshold or an air pressure falls below a given set point. Alternatively, the monitoring device could be set to respond to an on board vehicle interrogator request for periodic readings of temperature and pressure during tire operation in the field. Battery life would dictate the frequency and duration of communications that are possible.

[0044] While in accordance with the patent statutes the best mode and preferred embodiment has been set forth, the scope of the invention is not limited thereto, but rather by the scope of the attached claims.

Claims

1. A method for embedding a monitoring device (10,10') within a tire (5) during manufacture of the tire, comprising the steps of:

prior to curing the tire, placing the monitoring device having a dowel (206) on a tie gum ply (199) without having the monitoring device contact a body ply (204);
prior to curing the tire, assembling an inner liner ply (200) over said monitoring device and over said tie gum ply;
applying pressure to said inner liner ply so that said dowel presses through said inner liner ply;
curing the tire; and
removing said dowel so that an aperture (18)(84) extends through said inner liner ply to said monitoring device.

2. A method for securing a monitoring device (10,10')

to a tire (5), comprising the steps of:

- providing an inner liner patch (222) having a first side and a second side;
 inserting a dowel (220) having a body and a head (224) through a first side of said inner liner patch until said head contacts said first side of said patch and said body penetrates through to said second side of said patch;
 assembling the monitoring device to said second side of said patch so that a portion of the device is in contact with said body of said dowel penetrating said second side of said patch;
 adhering said inner liner patch to a tire inner liner ply (200) by contacting said second side of said patch to said tire inner liner;
 curing said inner liner patch to said tire inner liner ply by applying heat and pressure;
 removing said dowel so that an aperture (18,84) extends through said inner liner patch to said monitoring device.
3. The method of claim 1 or 2 wherein the step of assembling includes assembling in the vicinity of a crown (202) of the tire.
4. The method of claim 1 or 2 wherein the step of assembling includes assembling in the vicinity of a bead (210) of the tire.
5. An apparatus for monitoring an engineering condition of a tire comprising:
- a flexible housing (75,80) having a hardness of from about 50 to about 95 on the Shore A scale, said housing including a first surface which can be adhered to a second surface (7) located within a pressurizable cavity of a tire; and
 a monitoring device positioned within said housing, said monitoring device including:
- (a) a power source (44),
 (b) sensors for sensing the engineering condition (46),
 (c) means (20) for converting said sensed condition to data,
 (d) means (30,42) for transmitting said data responsive to a signal,
 (e) means for storing said data (20),
 (f) means for receiving a microwave frequency signal, (30,20,44)
 (g) means for transmitting said data in response to said microwave frequency signal. (20,30,42,44)
6. The apparatus as set forth in claim 5, wherein said power source is a battery (44) having an active

mode and a dormant mode, and the device further includes means for switching (20,44) said battery from said dormant mode to said active mode to activate said monitoring device in response to said transmitted microwave frequency signal, and means for switching said battery from said active mode to said dormant mode after said monitoring device has completed transmitting said data.

7. The apparatus as set forth in claim 5, wherein said monitoring device includes a circuit board, at least one sensor (46) for monitoring the engineering conditions of the tire, a microchip (20) mounted on said circuit board which receives said sensed condition and conditions said sensed condition as a signal, an (42) amplifier for amplifying said conditioned signal in response to an external signal, an antenna (30) for transmitting said amplified, conditioned signal, and a battery (44) for powering said microchip and said amplifier.
8. The apparatus of claim 5 wherein said monitoring device is encapsulated by a solid material (16) having a Shore D Hardness from about 5 to about 80 and an elastic modulus of from about 689 MPa (10⁵psi) to about 3,4 GPa (5 · 10⁵psi), to form a monitoring device assembly.
9. The apparatus as set forth in claim 5 mounted on the surface located within the pressurizable cavity of the tire, wherein said housing includes a recess (75) molded into the second tire surface, and a cover (80) positioned over said recess, said cover including a slot (96) for insertion of said monitoring device into said housing.
10. The apparatus as set forth in claim 5, wherein said means for receiving and said means for transmitting a signal is an antenna (30) and said housing includes a band (98) for retaining said antenna in a position exterior to said housing.

Patentansprüche

1. Verfahren zum Einbetten einer Überwachungseinrichtung (10, 10') in einen Reifen (5) während der Herstellung desselben, folgende Stufen umfassend:
- Vor dem Härten des Reifens Plazieren der einen Pflock (206) aufweisenden Überwachungseinrichtung auf eine bandförmige Gummilage (199), ohne daß die Überwachungseinrichtung eine Unterbaulage (204) berührt;
- vor dem Härten des Reifens Zusammensetzen einer Innenverkleidungslage (200) über die Überwachungseinrichtung und über die band-

förmige Gummilage;

Ausüben von Druck auf die Innenverkleidungslage, so daß sich der Pflock durch dieselbe hindurchdrückt;

5

Härten des Reifens; und Entfernen des Pflocks, so daß sich eine Öffnung (18; 84) durch die Innenverkleidungslage zur Überwachungseinrichtung erstreckt.

10

2. Verfahren zum Befestigen einer Überwachungseinrichtung 10, 10') an einem Reifen (5) folgende Stufen umfassend:

15

Vorsehen eines Innenverkleidungsflickens (222), der eine erste Seite und eine zweite Seite besitzt,

Einsetzen eines Pflocks (220), der ein Hauptstück und einen Kopf (224) besitzt, durch die erste Seite des Innenverkleidungsflickens, bis der Kopf die erste Seite des Flickens berührt und das Hauptstück durch die zweite Seite des Flickens hindurchdringt,

20

25

Zusammenbau der Überwachungseinrichtung und der zweiten Seite des Flickens, so daß ein Teil der Einrichtung in Kontakt mit dem Hauptstück des Pflockes ist und die zweite Seite des Flickens durchdringt;

30

Anbringen des Innenverkleidungsflickens an einer Innenverkleidungslage oder Innerlinerlage (200) dadurch, daß die zweite Seite des Flickens die Reifeninnenverkleidung berührt,

35

Aushärten des Innenverkleidungsflickens an der Reifeninnerlinerlage durch Ausüben von Wärme und Druck;

40

Entfernen des Pflockes, so daß eine Öffnung (18, 84) sich durch den Innenverkleidungsflicken bis zur Überwachungseinrichtung erstreckt.

45

3. Verfahren nach Anspruch 1 oder 2, wobei die Stufe des Zusammenbaus den Zusammenbau in der Nähe des Zenits (202) des Reifens umfaßt.

50

4. Verfahren nach Anspruch 1 oder 2, bei dem die Stufe des Zusammenbaus den Zusammenbau in der Nähe eines Wulstes (210) des Reifens umfaßt.

5. Vorrichtung zum Überwachen eines technischen Konstruktionszustandes eines Reifens, umfassend:

55

ein flexibles Gehäuse (75, 80), das eine Härte

von etwa 50 bis etwa 95 auf der Shore-A-Härteskala besitzt, wobei das Gehäuse eine erste Fläche umfaßt, die an einer zweiten Fläche (7) angebracht werden kann, die innerhalb eines unter Druck setzungsfähigen Hohlraums eines Reifens angeordnet ist, und

eine Überwachungseinrichtung, die innerhalb des Gehäuses positioniert werden kann, wobei die Überwachungseinrichtung folgendes umfaßt:

- (a) eine Kraftquelle (44),
- (b) Sensoren zum Ermitteln des technischen Konstruktionszustandes (46),
- (c) Mittel (20) zum Umwandeln des ermittelten Zustands in Daten,
- (d) Mittel (30, 42) zur Übermittlung der Daten, ansprechend auf ein Signal,
- (e) Mittel zum Speichern dieser Daten (20),
- (f) Mittel zum Empfangen eines Mikrowellenfrequenzsignals (30, 20, 44),
- (g) Mittel zum Übermitteln dieser Daten, ansprechend auf dieses Mikrowellenfrequenzsignal (20, 30, 42, 44).

6. Vorrichtung nach Anspruch 5, bei der die Kraftquelle eine Batterie (44) ist, die eine Aktiv- und eine Ruhephase besitzt, und wobei die Einrichtung ferner Mittel zum Schalten (20, 24) umfaßt, wobei die Batterie aus ihrer Ruhephase zur Aktivphase übergeht, um die Überwachungseinrichtung ansprechend auf ein übertragenes Mikrowellenfrequenzsignal zu aktivieren, und Mittel, um die Batterie von ihrer Aktivphase in die Ruhephase umzuschalten, nachdem die Überwachungseinrichtung mit der Übertragung der Daten abgeschlossen hat.

7. Vorrichtung nach Anspruch 5, bei der die Überwachungseinrichtung einen Schaltkreis, mindestens einen Sensor (46) zum Überwachen der technischen Konstruktionszustände des Reifens, sowie einen Mikrochip (20) umfassen, der auf dem Schaltkreisbrett befestigt ist, welcher den erfaßten Zustand erfaßt und den erfaßten Zustand als Signal verarbeitet, sowie einen Verstärker (42) zum Verstärken des verarbeiteten Signals ansprechend auf ein externes Signal, eine Antenne (30) zum Übertragen des verstärkten, verarbeiteten Signals und eine Batterie (44), um den Mikrochip und den Verstärker mit Leistung zu versorgen.

8. Vorrichtung nach Anspruch 5, bei der die Überwachungseinrichtung durch ein festes Material (16) eingekapselt ist, das eine Shore-D-Härte von etwa 5 bis etwa 80 und einen Elastizitätsmodul von etwa

689 MPa (10^5 psi) bis etwa 3,4 GPa (5×10^5 psi) besitzt, unter Ausbildung eines Zusammenbaus (17) der Überwachungseinrichtung.

9. Vorrichtung nach Anspruch 5, befestigt an der Fläche, die innerhalb des unter Druck setzungsfähigen Hohlraums des Reifens angeordnet ist, bei der das Gehäuse eine Ausnehmung (75) umfaßt, die in der zweiten Reifenfläche ausgeformt ist, sowie eine Abdeckung (80), die über der Ausnehmung positioniert ist, wobei die Abdeckung einen Schlitz (96) zum Einsatz der Überwachungseinrichtung ins Gehäuse umfaßt.
10. Vorrichtung nach Anspruch 5, bei der das Mittel zum Empfangen und das Mittel zum Übertragen eines Signals eine Antenne (30) ist und das Gehäuse ein Band (98) umfaßt, um die Antenne in einer Position außerhalb des Gehäuses zu halten.

Revendications

1. Procédé destiné à incorporer un dispositif (10, 10') de surveillance dans un pneumatique (5) au cours de la fabrication du pneumatique, comprenant les étapes :

avant cuisson du pneumatique, de mise en place du dispositif de surveillance, comportant une cheville (206), sur un pli de gomme de liaison (199) sans que le dispositif de surveillance contacte un pli de carcasse (204) ; avant cuisson du pneumatique, d'assemblage d'un pli (200) de doublure interne sur ledit dispositif de surveillance et sur ledit pli de gomme de liaison ; d'application de pression audit pli de doublure interne de façon que ladite cheville soit poussée à travers ledit pli de doublure interne ; de cuisson du pneumatique ; et de retrait de ladite cheville de façon qu'une ouverture (18) (84) s'étende à travers ledit pli de doublure interne jusqu'audit dispositif de surveillance.

2. Procédé destiné à fixer un dispositif (10, 10') de surveillance à un pneumatique (5), comprenant les étapes :

de fourniture d'une pièce (222) de doublure interne ayant un premier côté et un second côté ; d'introduction d'une cheville (220) ayant un corps et une tête (224) à travers un premier côté de ladite pièce de doublure interne jusqu'à ce que ladite tête contacte ledit premier côté de ladite pièce et ledit corps pénètre à travers ledit second côté de ladite pièce ;

d'assemblage du dispositif de surveillance sur ledit second côté de ladite pièce de façon qu'une partie du dispositif soit en contact avec ledit corps de ladite cheville pénétrant ledit second côté de ladite pièce ;

de collage de ladite pièce de doublure interne à un pli (200) de doublure interne de pneumatique en mettant en contact ledit second côté de ladite pièce avec ladite doublure interne de pneumatique ;

de cuisson de ladite pièce de doublure interne avec ledit pli de doublure interne de pneumatique par application de chaleur et de pression ; de retrait de ladite cheville de façon qu'une ouverture (18, 84) s'étende à travers ladite pièce de doublure interne jusqu'audit dispositif de surveillance.

3. Procédé selon la revendication 1 ou 2, dans lequel l'étape d'assemblage comprend l'assemblage au voisinage d'une couronne (202) du pneumatique.

4. Procédé selon la revendication 1 ou 2, dans lequel l'étape d'assemblage comprend l'assemblage au voisinage d'un talon (210) du pneumatique.

5. Appareil destiné à surveiller un état technique d'un pneumatique comprenant :

un logement souple (75, 80) ayant une dureté d'environ 50 à environ 95 sur l'échelle A de Shore, ledit logement comportant une première surface qui peut être collée à une seconde surface (2) située à l'intérieur d'une cavité pouvant être mise sous pression d'un pneumatique ; et un dispositif de surveillance placé à l'intérieur dudit logement, ledit dispositif de surveillance incluant :

- (a) une source d'énergie (44) ;
- (b) des capteurs (46) destinés à détecter l'état technique ;
- (c) un moyen (20) destiné à convertir ledit état détecté en données ;
- (d) un moyen (30, 42) destiné à émettre lesdites données en réponse à un signal ;
- (e) un moyen (20) destiné à mémoriser lesdites données ;
- (f) un moyen (30, 20, 44) destiné à recevoir un signal hyperfréquence ;
- (g) un moyen (20, 30, 42, 44) destiné à émettre lesdites données en réponse audit signal hyperfréquence.

6. Appareil selon la revendication 5, dans lequel ladite source d'énergie est une pile (44) ayant un mode actif et un mode dormant, et dans lequel le disposi-

tif comprend en outre un moyen (20, 44) destiné à faire passer ladite pile dudit mode dormant audit mode actif pour activer ledit dispositif de surveillance en réponse audit signal hyperfréquence émis, et un moyen destiné à faire passer ladite pile dudit mode actif audit mode dormant après que ledit dispositif de surveillance a fini d'émettre lesdites données.

7. Appareil selon la revendication 5, dans lequel ledit dispositif de surveillance comprend une carte de circuit, au moins un capteur (46) destiné à surveiller l'état technique du pneumatique, une micropuce (20), montée sur ladite carte de circuit, qui reçoit ledit état détecté et qui conditionne ledit état détecté en tant que signal, un amplificateur (42) destiné à amplifier ledit signal conditionné en réponse à un signal externe, une antenne (30) destinée à émettre ledit signal conditionné amplifié, et une pile (44) destinée à alimenter en énergie ladite micropuce et ledit amplificateur.
8. Appareil selon la revendication 5, dans lequel ledit dispositif de surveillance est enrobé par une matière solide (16) ayant une dureté Shore D d'environ 5 à environ 80 et un module d'élasticité d'environ 689 MPa (10^5 psi) à environ 3,4 GPa ($5 \cdot 10^5$ psi), pour former un assemblage (17) de dispositif de surveillance.
9. Appareil selon la revendication 5, monté sur la surface située à l'intérieur de la cavité pouvant être mise sous pression du pneumatique, dans lequel ledit logement comprend un évidement (75) moulé dans la seconde surface de pneumatique et un couvercle (80) placé sur ledit évidement, ledit couvercle incluant une fente (96) pour l'introduction dudit dispositif de surveillance dans ledit logement.
10. Appareil selon la revendication 5, dans lequel ledit moyen destiné à recevoir et ledit moyen destiné à émettre un signal est une antenne (30) et ledit logement comprend une bande (98) destinée à maintenir ladite antenne dans une position à l'extérieur dudit logement.

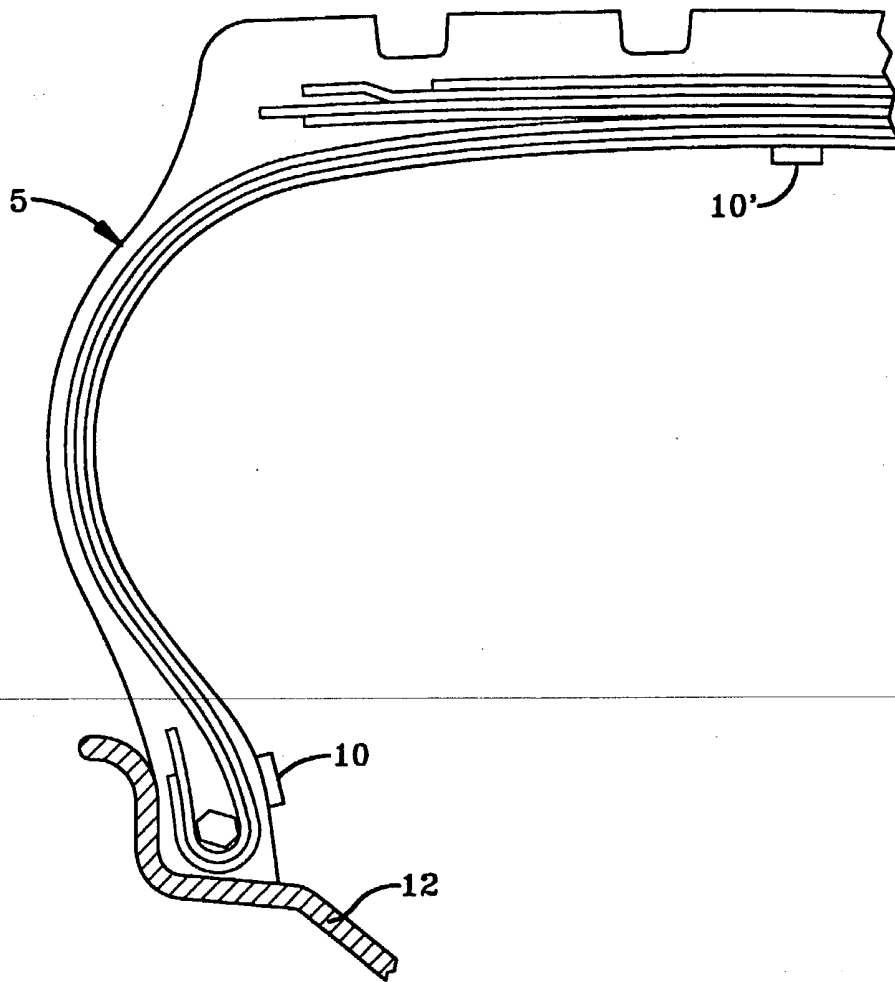


FIG-1

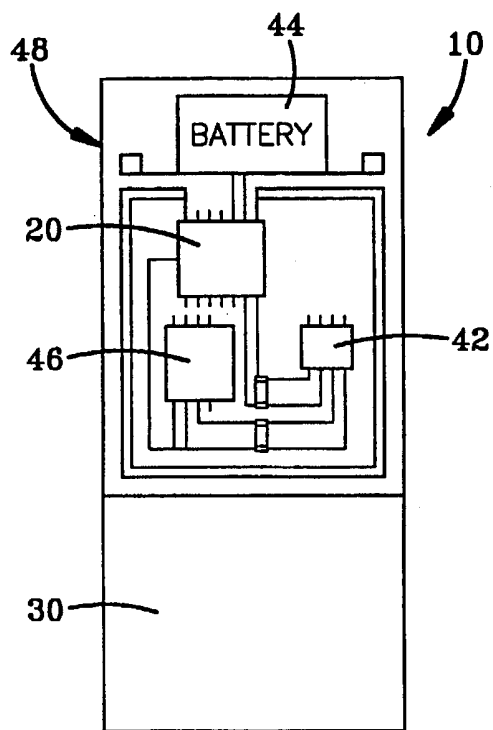


FIG-2

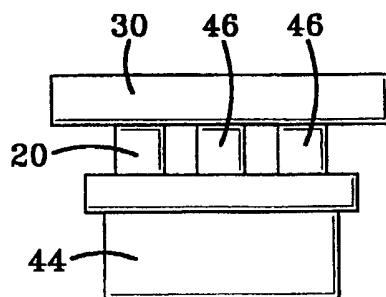
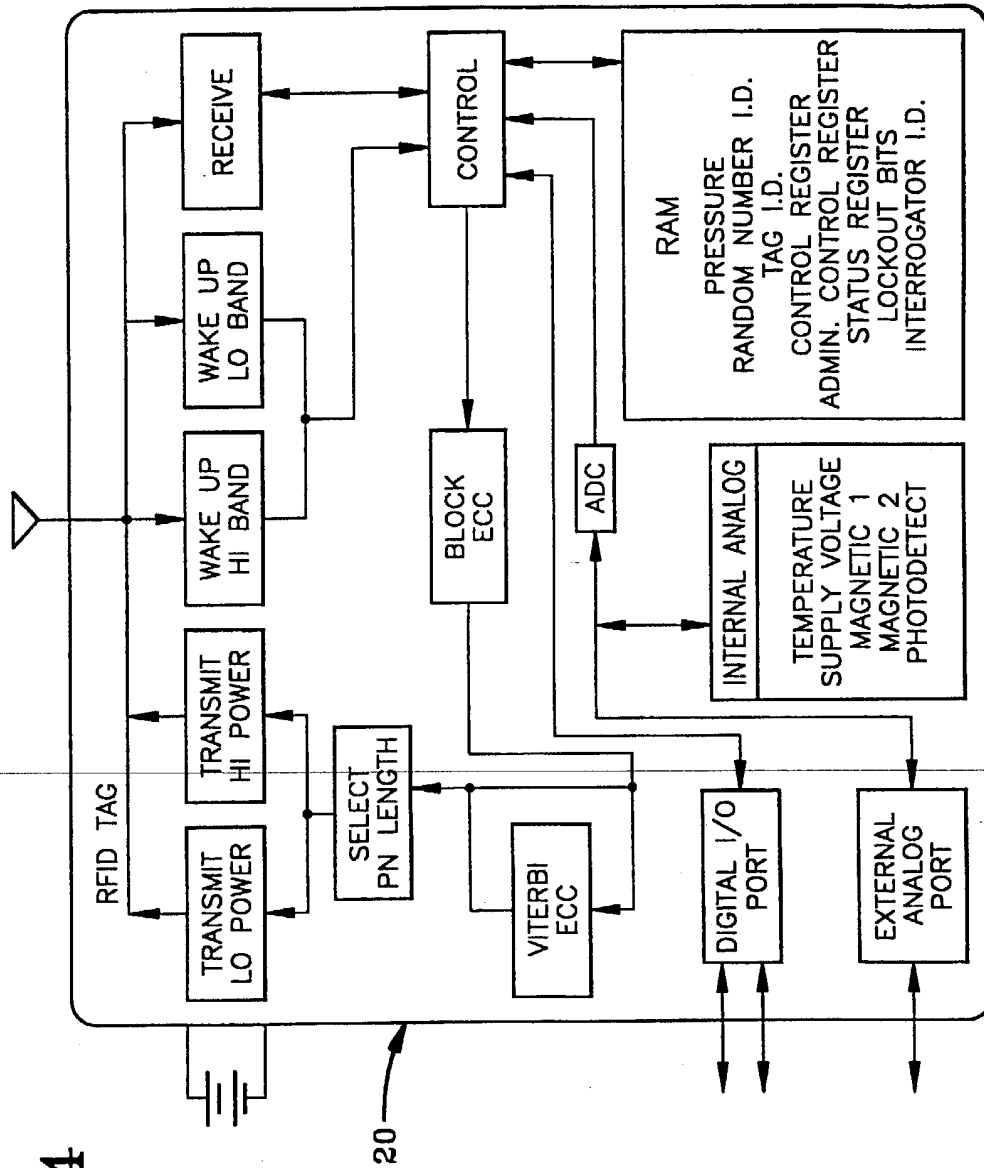


FIG-3

FIG-4



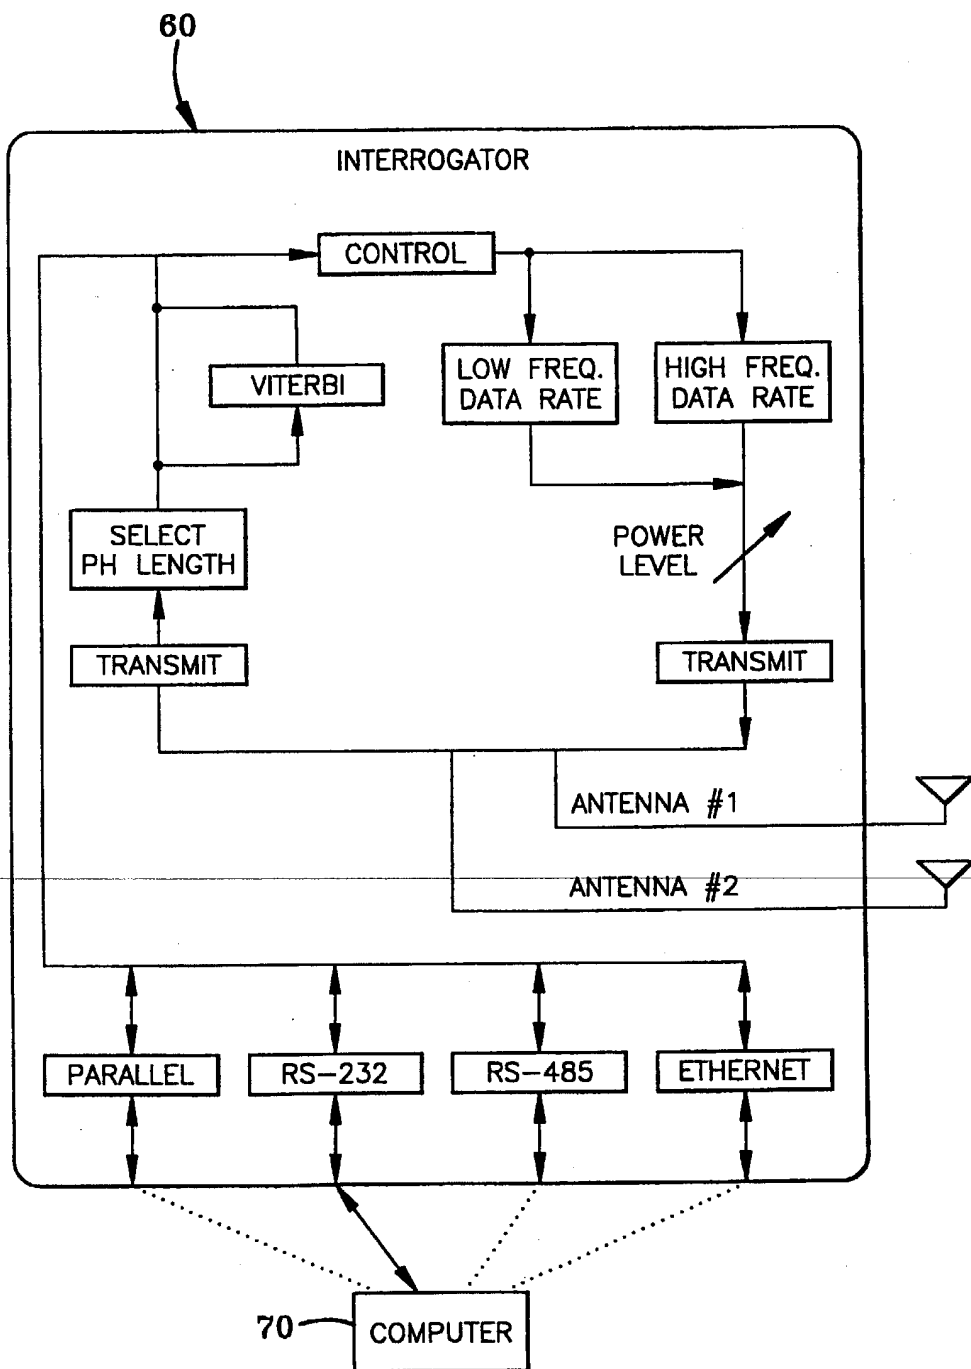
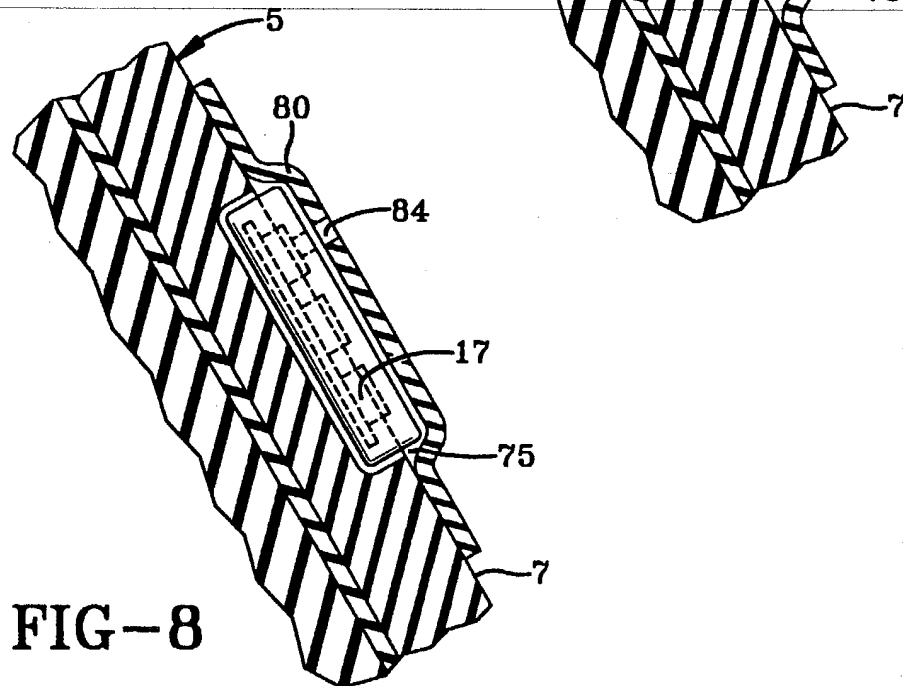
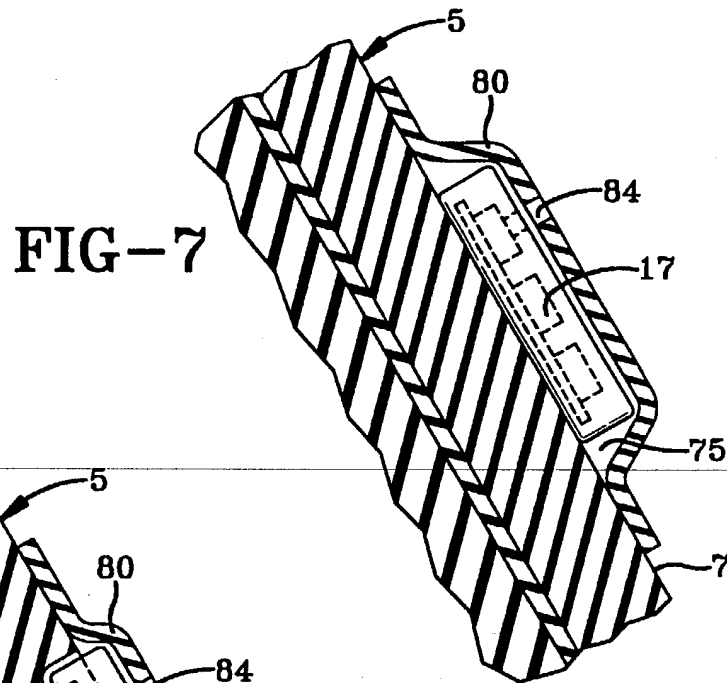
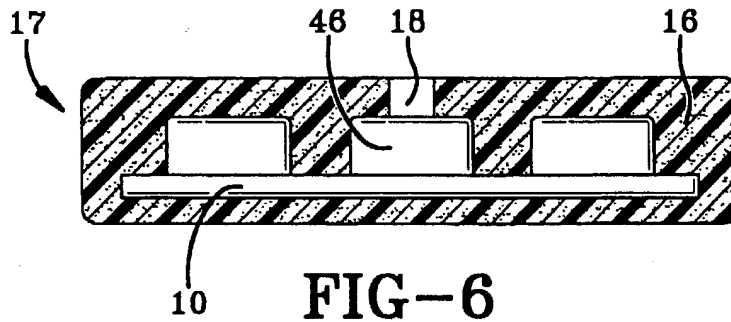


FIG-5



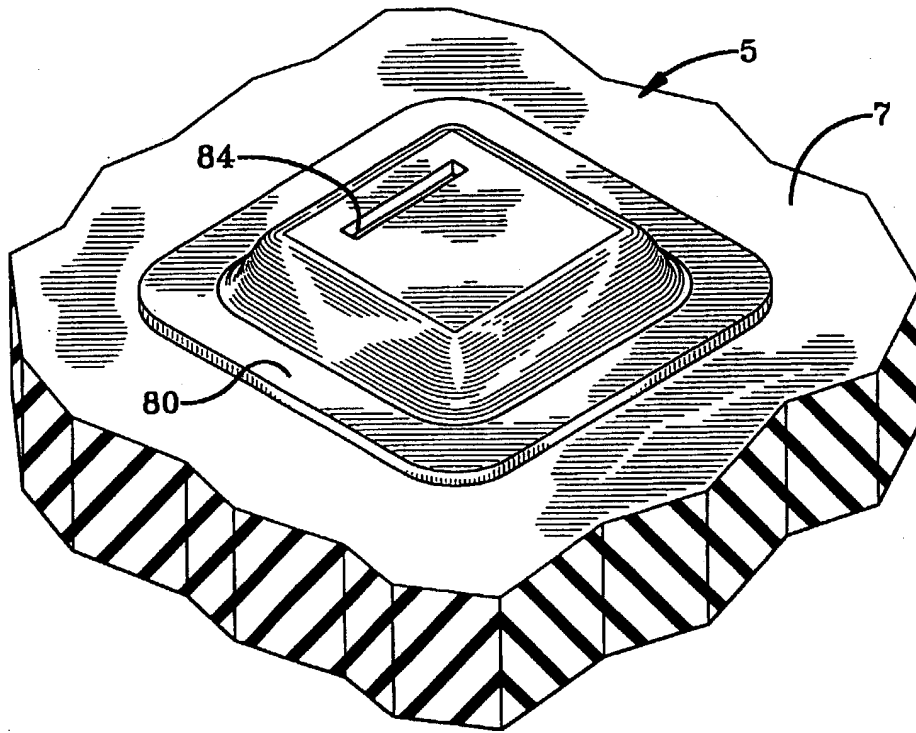


FIG-9

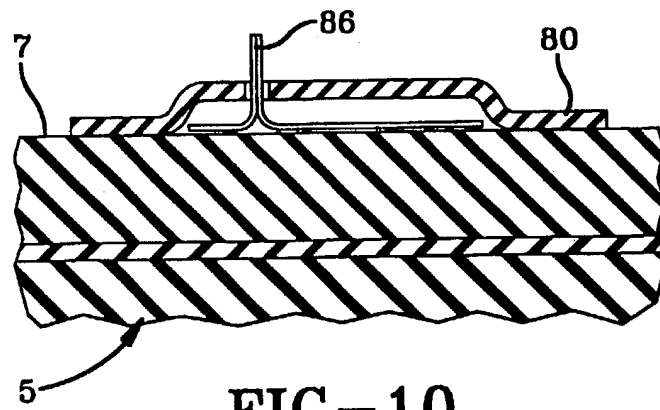


FIG-10

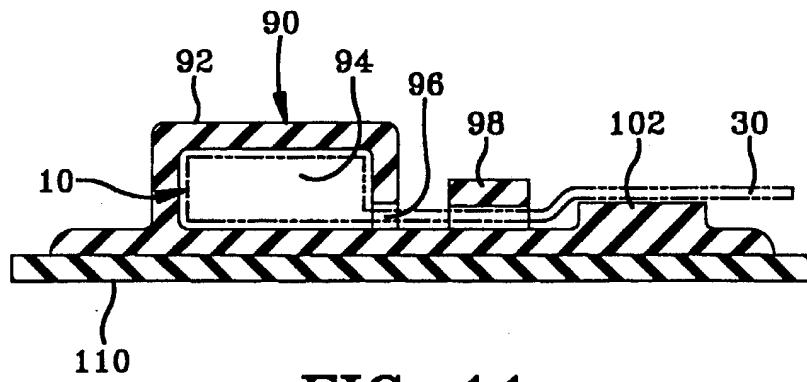


FIG-11

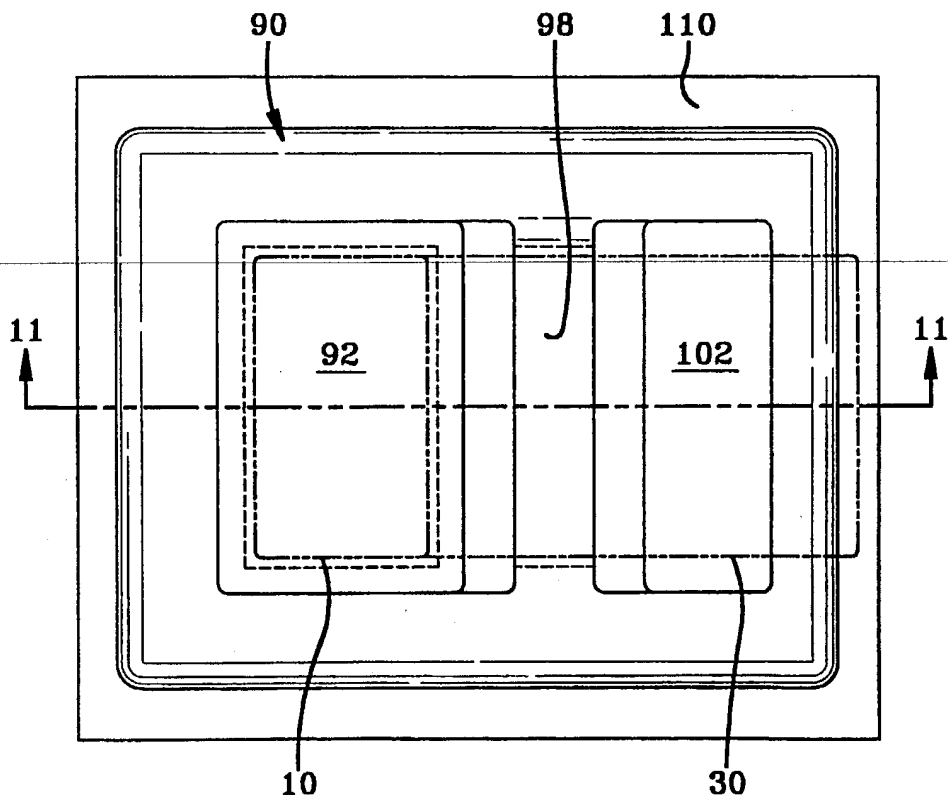


FIG-12

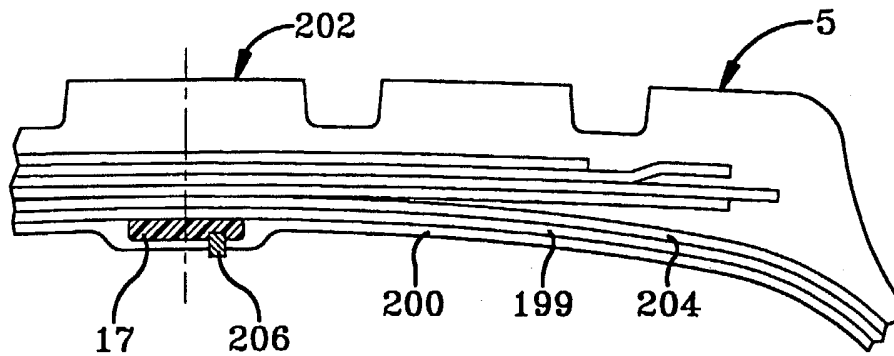


FIG-13

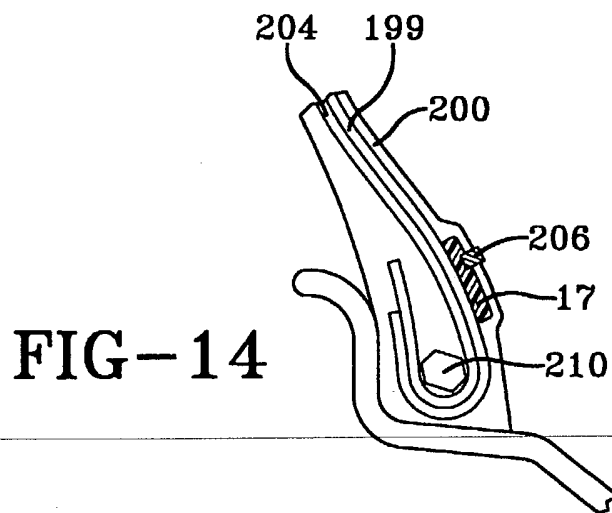


FIG-14

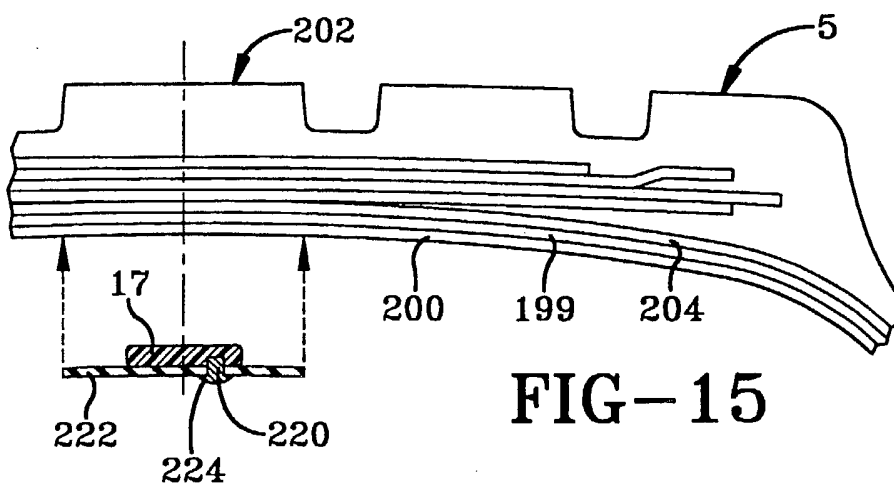


FIG-15